




Serie **2 VIE**

Articolo **8E126*****

Valvola a sfera 2 vie in acciaio inox AISI 316L, filettata F/F, fire safe BS 6755, antistatic device, per alta pressione, con attuatore elettrico; idonee per olio (idraulico, ecc.) emulsione. Per applicazioni particolari consultare l'ufficio commerciale.

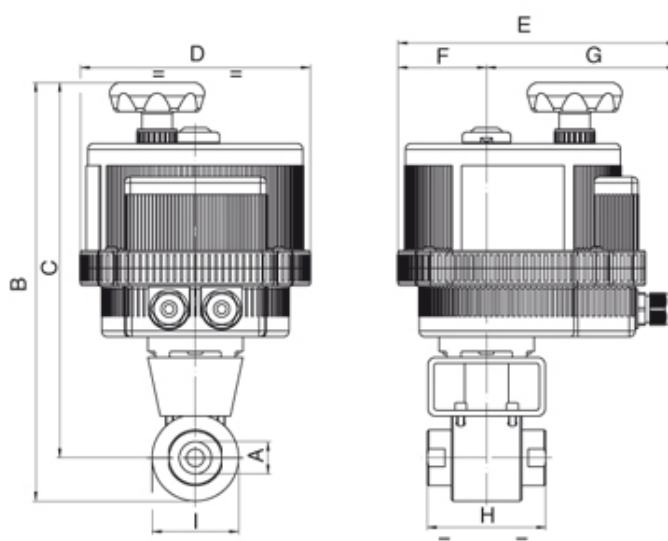

PN	500	500	400	350	350	350	350
DN - A	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	235	286	321	356	369	402	432
C	208	257	284	315	319	345	370
D	123	157	157	185	211	211	222
E	164	191	191	215	237	237	247
F	43	61	61	68	84	84	77
G	121	130	130	147	153	153	170
H	72	81	98	106	127	135	160
I	54	59	74	83	99	114	123
ACT.	VB 015	VB 030	VB 030*	VB 060	VB 110	VB 110	VB 270
RI	4220	4220	4229	4229	4222	4223	4224

* VERSIONE SPECIALE - SPECIAL VERSION

*** CODICE TENSIONE PER ORDINAZIONE			
VOLTAGE SUPPLY ORDER CODE			
PER MOD. VB015 FOR MOD. VB015	12V AC/DC + 001	24V AC/DC + 002	100-240V AC + 004
PER MOD. VB30÷350 FOR MOD. VB30÷350	12V DC + 001		