




Serie **3 VIE**

Articolo **8E0168 (L)*** - 8E0169 (T)*****

Valvola a sfera tipo combi-sfer, [Valpres Art. 776401 (L) Art. 776400 (T)], 3 vie sfera forata "T" o "L", con 4 guarnizioni, flangiata PN16, acciaio inox AISI 316 passaggio totale, con attuatore elettrico.

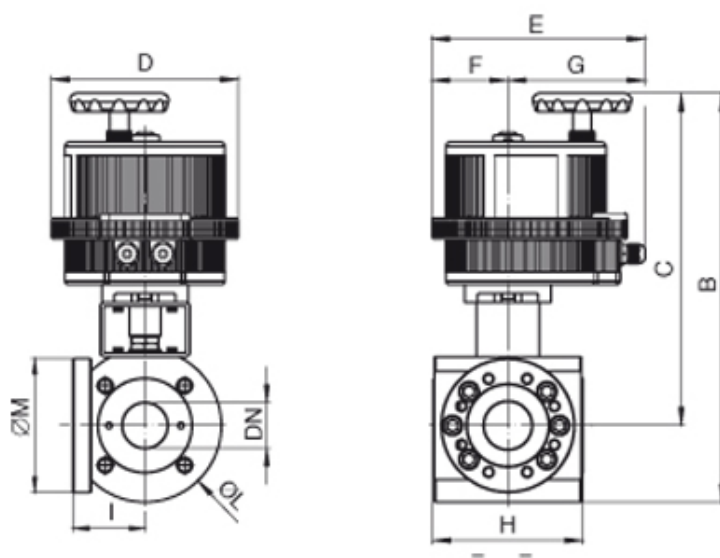

DN	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16
B	273	332	352	402	419	454	485	536	556
C	225	282	297	337	344	369	380	421	417
D	123	157	157	185	185	211	211	222	222
E	164	191	191	215	215	237	237	247	247
F	43	61	61	68	68	84	84	77	77
G	121	130	130	147	147	153	153	170	170
H	97	108	115	140	150	167	185	216	250
I	32	40	41,5	52,5	56,5	62	70	127	150
ØL	95	100	109	130	150	170	210	229	278
ØM	/	/	/	/	/	/	/	212	239
ACT.	VB 015	VB 030	VB 030	VB 060	VB 060	VB 110	VB 190	VB 270	VB 270
RI	4408	4408	3520	4416	4039	3522	4411	4412	4412

*** CODICE TENSIONE PER ORDINAZIONE

VOLTAGE SUPPLY ORDER CODE

PER MOD. VB015 FOR MOD. VB015	12V AC/DC + 001	24V AC/DC + 002	100-240V AC + 004
PER MOD. VB30÷350 FOR MOD. VB30÷350	12V DC + 001		

IN FASE D'ORDINE DEFINIRE LA POSIZIONE DELLA SFERA - PLEASE SPECIFY THE FLOW PATH WHILE ORDERING.

