

RICCI CON ATTACCHI SALDATI

MATERIALE:	RAME
LIMITI IMPIEGO :	25 BAR A 120°C
MATERIAL:	COPPER
WORKING LIMITS:	25 BAR AT 120°C

MODELLO MODEL	ATTACCHI CONNECTIONS	H H
RP4/C1	1/4"GAS F x 1/4"GAS M	170
RP4/C2	3/8"GAS F x 3/8"GAS M	170
RP4/C3	1/2"GAS F x 1/2"GAS M	180

MATERIALE:	ACCIAIO AL CARBONIO
LIMITI IMPIEGO :	100 BAR A 120°C / 50 BAR A 450°C
MATERIAL:	CARBON STEEL
WORKING LIMITS:	100 BAR AT 120°C / 50 BAR AT 450°C

MODELLO MODEL	ATTACCHI CONNECTIONS	H H
RP4/F1	1/4"GAS F x 1/4"GAS M	180
RP4/F2	3/8"GAS F x 3/8"GAS M	180
RP4/F3	1/2"GAS F x 1/2"GAS M	190

MATERIALE:	AISI 316
LIMITI IMPIEGO :	100 BAR A 120°C / 50 BAR A 450°C
MATERIAL:	AISI 316 St. St.
WORKING LIMITS:	100 BAR AT 120°C / 50 BAR AT 450°C

MODELLO MODEL	ATTACCHI CONNECTIONS	H H
RP4/S1	1/4"GAS F x 1/4"GAS M	200
RP4/S2	3/8"GAS F x 3/8"GAS M	200
RP4/S3	1/2"GAS F x 1/2"GAS M	210
RP4/S6	1/2"NPT F x 1/2"NPT M	220

RICCI SENZA SALDATURE


MATERIALE:	ACCIAIO AL CARBONIO
LIMITI IMPIEGO :	200 BAR A 20°C / 150 BAR A 400°C
MATERIAL:	CARBON STEEL
WORKING LIMITS:	200 BAR AT 20°C / 150 BAR AT 400°C

MODELLO MODEL	ATTACCHI CONNECTIONS	H H
RP8/F3	1/2"GAS F x 1/2"GAS M	240
RP8/F6	1/2"NPT F x 1/2"NPT M	240

MATERIALE:	AISI 316
LIMITI IMPIEGO :	250 BAR A 20°C / 130 BAR A 400°C
MATERIAL:	AISI 316 St. St.
WORKING LIMITS:	250 BAR AT 20°C / 130 BAR AT 400°C

MODELLO MODEL	ATTACCHI CONNECTIONS	H H
RP8/S3	1/2"GAS F x 1/2"GAS M	240
RP8/S6	1/2"NPT F x 1/2"NPT M	240

PIG TAILS WITH WELDED CONNECTIONS

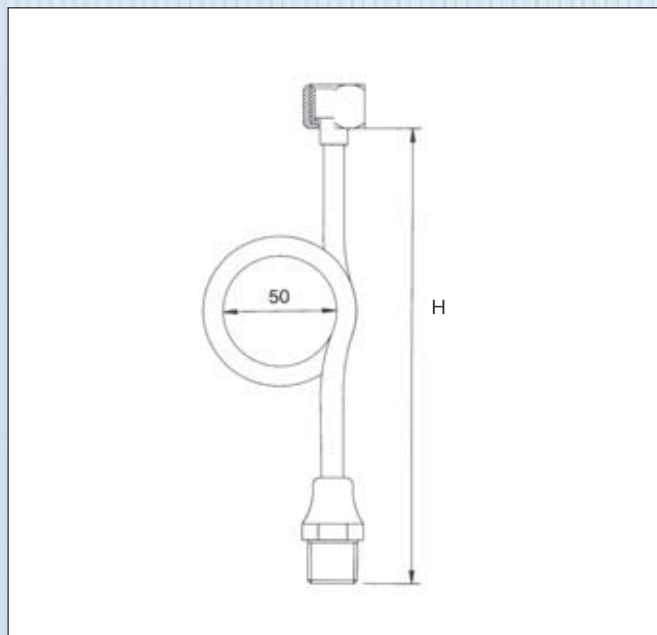

PIG TAILS FROM SEAMLESS TUBE

